
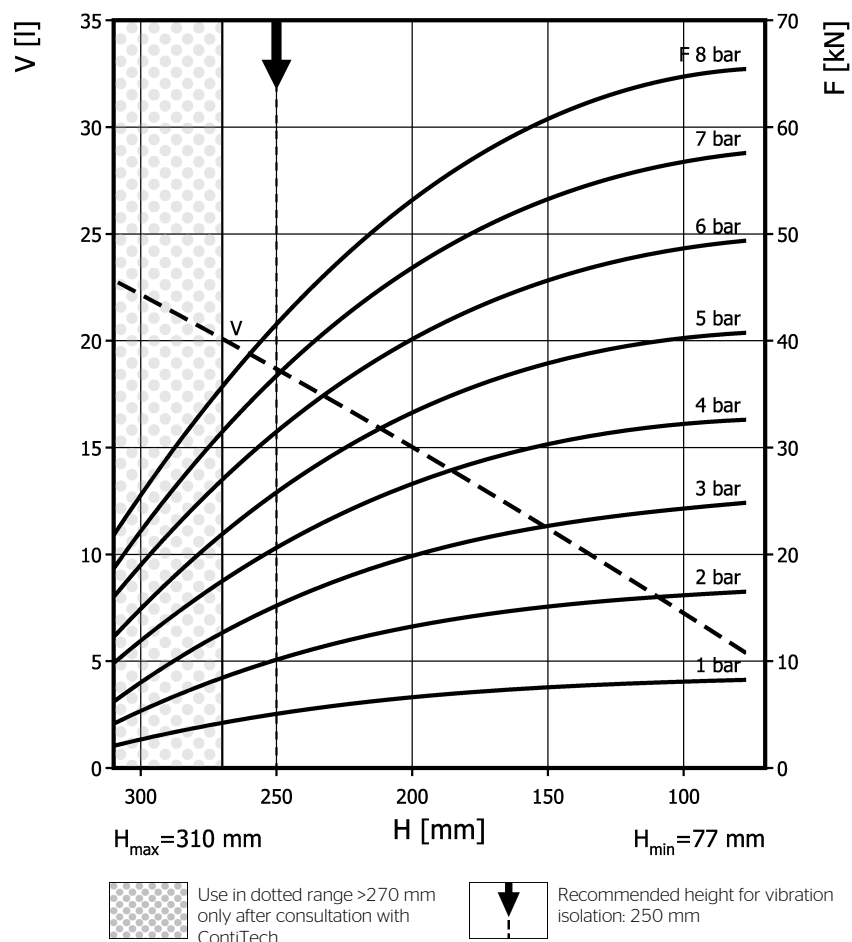


FD 530-22 CI

Double Convolution Air Actuator

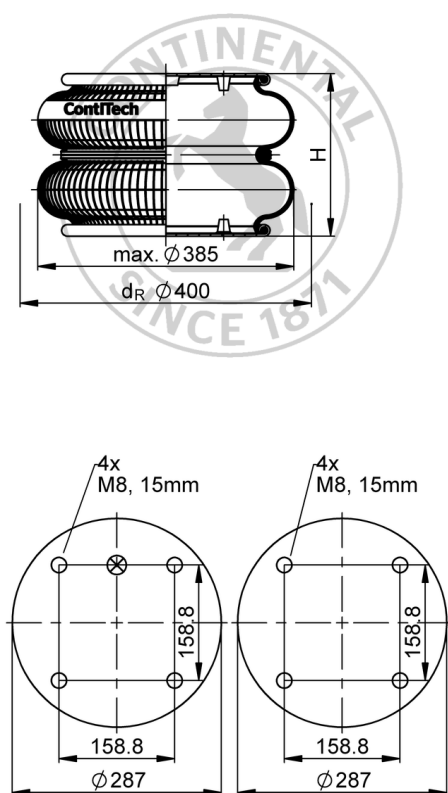

Purchase order data

Type	Order No.
rubber bellows only	60406
with crimped plates, G1/4 air inlet A = 79.4 mm excentrical	61362
with crimped plates, G3/4 air inlet A = 79.4 mm excentrical	66512
with crimped plates, G1 air inlet A = 79.4 mm excentrical	2682075000

Additional types on request

Technical data

Min. pressure	0 bar
Return force to min height	≤ 400 N
Overall weight	6.9 kg

Vibration isolation - dynamic characteristic values

Design height H: recommended 250mm, minimum 225mm

Pressure p [bar]	3	4	5	6	7	8	Vol. V [l]
Force (Load) [kN]	15.2	20.7	25.8	31.5	36.8	42	19
Spring rate [N/mm]	222.5	286	349.5	413	476.5	540	
Natural frequency [Hz]	1.9	1.8	1.8	1.8	1.8	1.7	

Pneumatic application - static characteristic values

Force F [kN]

Force F [kN]								
Pressure p	[bar]	3	4	5	6	7	8	Vol. V [l]
Height H [mm]	260	14.1	19.3	24.1	29.5	34.5	39.4	20
	220	18.2	24.4	30.5	37	43.2	49.1	17
	180	21	28.2	35.3	42.6	49.7	56.8	14
	140	23.1	31	38.7	46.5	54.3	61.9	11
	100	24.4	32.3	40.4	48.7	56.8	64.7	7.2



Service instructions

M8: max. 25 Nm

G1/4: max. 25 Nm

G1: max. 50 Nm

G3/4: max. 50 Nm

Measuring procedure: Room temperature / Force-height-data quasistatic / Dynamic data at 1 Hz